

## KVR1066D3S8R7SK3/3G

### 3GB (1GB 128M x 72-Bit x 3 pcs.) PC3-8500

### CL7 Registered w/Parity 240-Pin DIMM Kit

#### DESCRIPTION:

ValueRAM's KVR1066D3S8R7SK3/3G is a kit of three 128M x 72-bit 1GB (1024MB) DDR3-1066 CL7 SDRAM (Synchronous DRAM) registered w/parity, single-rank memory modules, based on nine 128M x 8-bit DDR3-1066 FBGA components per module. Total kit capacity is 3GB (3072MB). Each SPD is programmed to JEDEC standard latency 1066Mhz timing of 7-7-7 at 1.5V. Each 240-pin DIMM uses gold contact fingers and requires +1.5V. The electrical and mechanical specifications are as follows:


#### FEATURES:

- JEDEC standard 1.5V ± 0.075V Power Supply
- VDDQ = 1.5V ± 0.075V
- 533MHz fCK for 1066Mb/sec/pin
- 8 independent internal bank
- Programmable CAS Latency: 6,7,8,9,10
- Programmable Additive Latency: 0, CL - 2, or CL - 1 clock
- Programmable CAS Write Latency(CWL) = 6(DDR3-1066)
- 8-bit pre-fetch
- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- Bi-directional Differential Data Strobe
- Internal(self) calibration : Internal self calibration through ZQ pin (RZQ : 240 ohm ± 1%)
- On Die Termination using ODT pin
- On-DIMM thermal sensor (Grade B)
- Average Refresh Period 7.8us at lower then TCASE 85°C, 3.9us at 85°C < TCASE . 95°C
- Asynchronous Reset
- PCB : Height 1.180" (30.00mm), double sided component

#### PERFORMANCE:

- |                                                                                      |                                |
|--------------------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="checkbox"/> CL(IDD)                                          | 7 cycles                       |
| <input checked="" type="checkbox"/> Row Cycle Time (tRCmin)                          | 50.625ns (min.)                |
| <input checked="" type="checkbox"/> Refresh to Active/Refresh Command Time (tRFCmin) | 110ns (min.)                   |
| <input checked="" type="checkbox"/> Row Active Time (tRASmin)                        | 37.5ns (min.)                  |
| <input checked="" type="checkbox"/> Power                                            | 2.452 W (operating per module) |
| <input checked="" type="checkbox"/> UL Rating                                        | 94 V - 0                       |
| <input checked="" type="checkbox"/> Operating Temperature                            | 0° C to 85° C                  |
| <input checked="" type="checkbox"/> Storage Temperature                              | -55° C to +100° C              |

## MODULE DIMENSIONS:

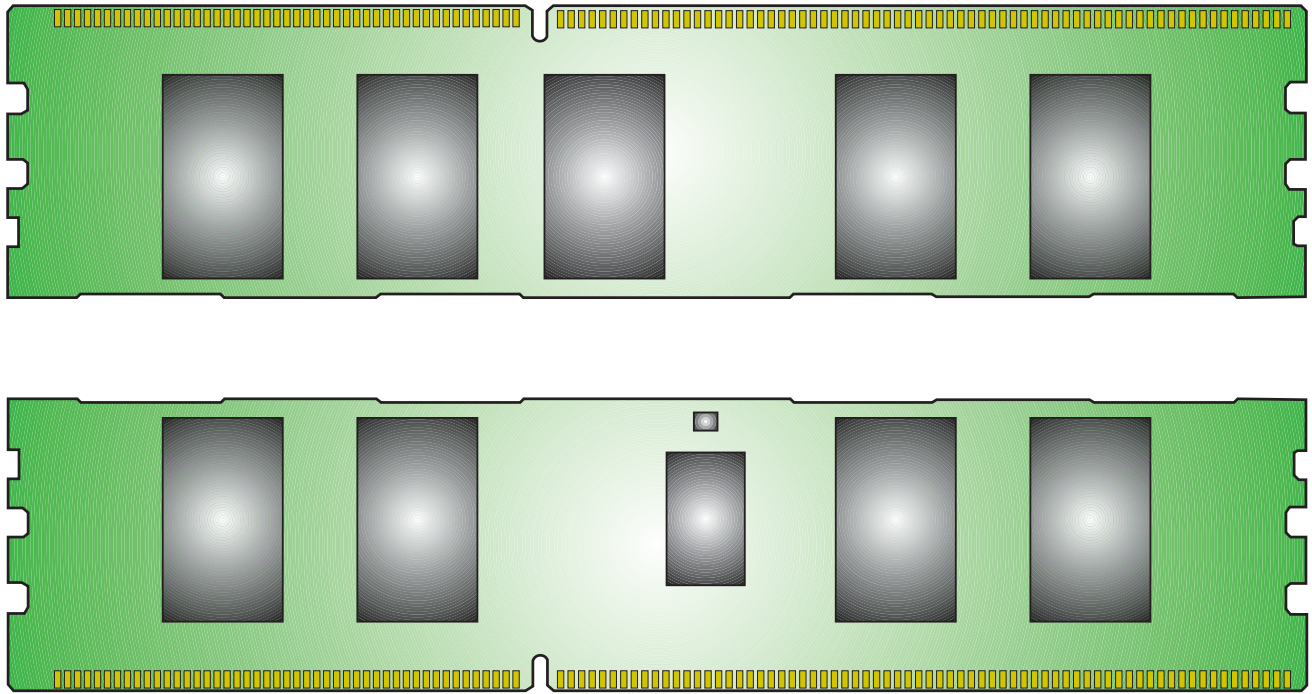

(units = millimeters)

