

## KVR400D2S3/1G

### 1GB 128M x 64-Bit DDR2-400

### CL3 200-Pin SODIMM


#### DESCRIPTION:

This document describes ValueRAM's 128M x 64-bit 1GB (1024MB) DDR2-400 CL3 SDRAM (Synchronous **DRAM**) memory module. The components on this module include sixteen 64M x 8-bit (16M x 8-bit x 4 Bank) DDR2-400 SDRAM in FBGA packages. This 200-pin SODIMM uses gold contact fingers and requires +1.8V. The electrical and mechanical specifications are as follows:

#### FEATURES:

✓ Clock Cycle Time (tCK) CL=3	5ns (min.) / 8ns (max.)
✓ Row Cycle Time (tRC)	55ns (min.)
✓ Refresh to Active/Refresh Command Time (tRFC)	75ns
✓ Row Active Time (tRAS)	40ns (min.) / 70,000ns (max.)
✓ Single Power Supply of	+1.8V (+/- .1V)
✓ Power	2.304 W (operating)
✓ UL Rating	94 V - 0

**Note:** The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 30.00mm.

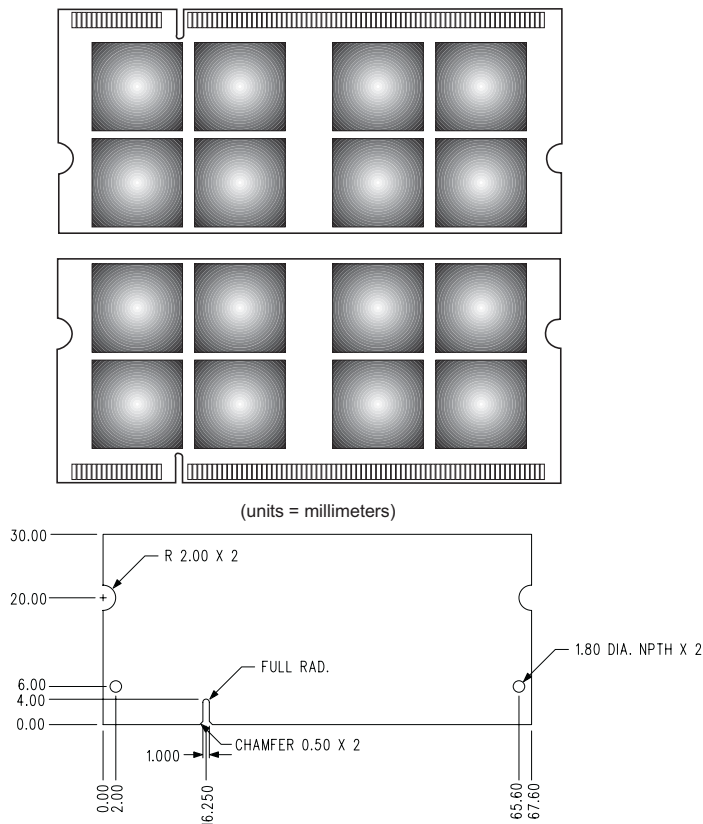

**Figure 1: KVR400D2S3/1G 200-Pin SODIMM**