

## KVR400X64C3AK2/2G 2GB (128M x 64-Bit x 2 pcs.) DDR400 CL3 184-Pin DIMM Kit


### DESCRIPTION:

ValueRAM's KVR400X64C3AK2/2G is a kit of two 128M x 64-bit (1GB) DDR400 CL3 SDRAM (Synchronous **DRAM**) memory modules. Total kit capacity is 2GB (2048MB). The components on each module include sixteen 64M x 8-bit (16M x 8-bit x 4 Bank) DDR400 SDRAM in TSOP packages. Each 184-pin DIMM uses gold contact fingers and requires +2.6V. The electrical and mechanical specifications are as follows:

### FEATURES:

- |                                 |                               |
|---------------------------------|-------------------------------|
| ✓ Clock Cycle Time (tCK)        | 5ns (min.) / 10ns (max.)      |
| ✓ Row Cycle Time (tRC)          | 55ns (min.)                   |
| ✓ Refresh Row Cycle Time (tRFC) | 70ns (min.)                   |
| ✓ Row Active Time (tRAS)        | 40ns (min.) / 70,000ns (max.) |
| ✓ Single Power Supply of        | +2.6V (+/- .1V)               |
| ✓ Power (IDD0)                  | 5.408 W (operating)           |
| ✓ Operating Temperature         | 0° C to 70° C                 |
| ✓ Storage Temperature           | -55° C to +150° C             |
| ✓ UL Rating                     | 94 V - 0                      |

**Note:** The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

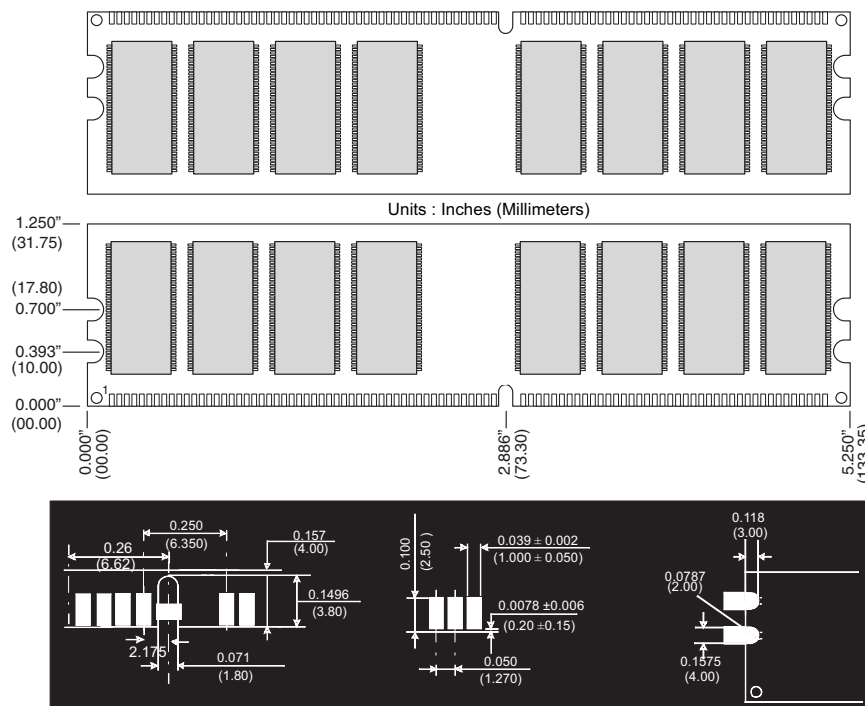

**Figure 1: KVR400X64C3AK2/2G 184-Pin DIMM**