

KVR266X64C2/1G 1GB 128 x 64-Bit DDR266 CL2 184-Pin DIMM

DESCRIPTION:

This document describes ValueRAM's 128M x 64-bit 1GB (1024MB) DDR266 CL2 SDRAM (Synchronous **DRAM**) memory module. The components on this module include sixteen 64M x 8-bit (16M x 8-bit x 4 Bank) DDR266 SDRAM in TSOP packages. This 184-pin DIMM uses gold contact fingers and requires +2.5V. The electrical and mechanical specifications are as follows:

FEATURES:

- ✓ Clock Cycle Time (tCK) 7.5ns (min.) / 12ns (max.)
- ✓ Row Cycle Time (tRC) 65ns (min.)
- ✓ Refresh Row Cycle Time (tRFC) 75ns (min.)
- ✓ Row Active Time (tRAS) 45ns (min.) / 120,000ns (max.)
- ✓ Single Power Supply of +2.5V (+/- .2V)
- ✓ Power (IDD0) 3.200 W (operating)
- ✓ UL Rating 94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

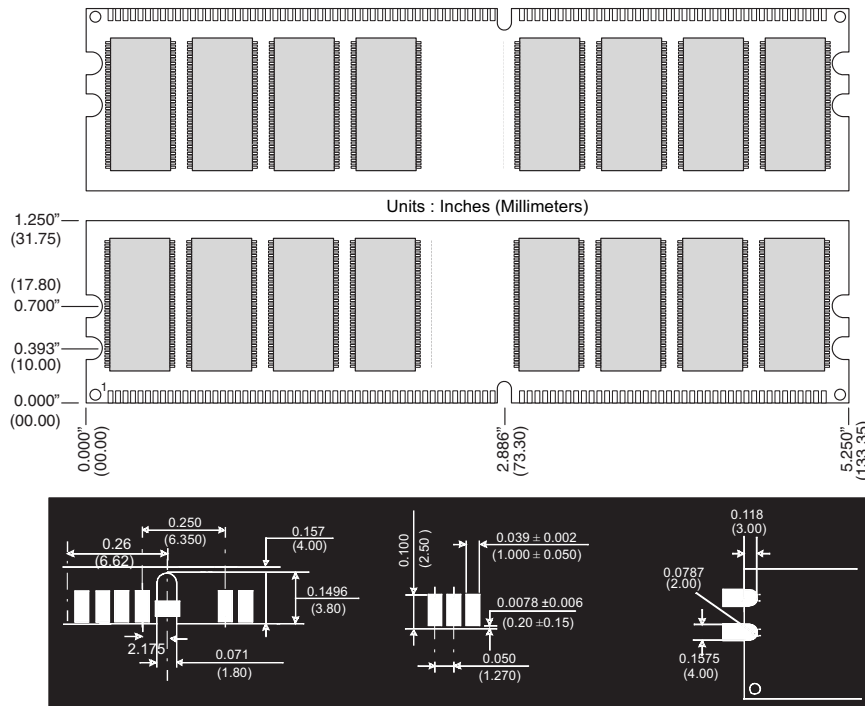


Figure 1: KVR266X64C2/1G 184-Pin DIMM